


6491-X / H05V-U SINGLE CORE CABLE

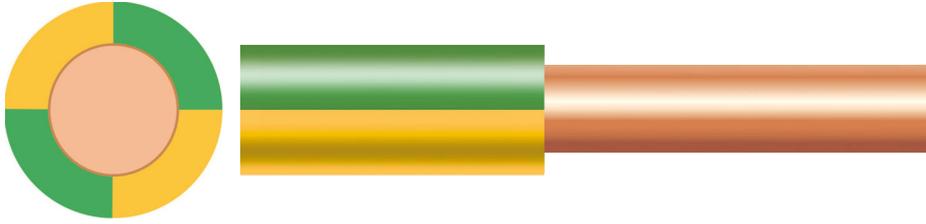

Versatile cable, ideal for power, lighting circuits, and building wiring. It's suitable for various installations, including semi-flush and embedded conduits, as well as internal appliance wiring. Additionally, it serves as a single core for devices and luminaires, and for signal facilities. Suitable for dry room applications, including switching and distribution panels.

CONDUCTOR	Plain Copper
STRANDING	Class 1
INSULATION	PVC
OUTERSHEATH	PVC
OUTERSHEATH COLOUR	Black, White, Blue, Grey, Red, Green/Yellow, Brown, Yellow
RATED VOLTAGE	300/500V
OPERATING TEMPERATURE	70°C

SPECIFICATION DATA

BATT Part No	Colour	Nominal cross sectional area of conductor	Approx overall diameter	Weight
16760	Black	0.5	2.2	10
16761	Yellow	0.5	2.2	10
16759	White	0.5	2.2	10
16758	Grey	0.5	2.2	10
16019	Red	1	2.4	14
16020	Black	1	2.4	14
16025	Green/Yellow	1	2.4	14
16021	Blue	1	2.4	14
16022	Yellow	1	2.4	14
16444	Brown	1	2.4	14
16023	White	1	2.4	14

RATING TABLES

TABLE 4D1A – Single-core 70 °C thermoplastic insulated cables, non-armoured, with or without sheath (COPPER CONDUCTORS)

CURRENT-CARRYING CAPACITY (amperes):											
Conductor cross-sectional area	Reference Method A (enclosed in conduit in thermally insulating wall etc.)		Reference Method B (enclosed in conduit on a wall or in trunking etc.)		Reference Method C (clipped direct)		Reference Method F (in free air or on a perforated cable tray horizontal or vertical)				
							Touching			Spaced by one diameter	
	2 cables, single-phase AC or DC	3 or 4 cables, three-phase AC	2 cables, single-phase AC or DC	3 or 4 cables, three-phase AC	2 cables, single-phase AC or DC flat and touching	3 or 4 cables, three-phase AC flat and touching or trefoil	2 cables, single-phase AC or DC flat	3 cables, three-phase AC flat	3 cables, three-phase AC trefoil	2 cables, single-phase AC or DC or 3 cables three-phase AC flat	
	2	3	4	5	6	7	8	9	10	11	12
1 (mm ²)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)	(A)
1	11	10.5	13.5	12	15.5	14	-	-	-	-	-
1.5	14.5	13.5	17.5	15.5	20	18	-	-	-	-	-
2.5	20	18	24	21	27	25	-	-	-	-	-
4	26	24	32	28	37	33	-	-	-	-	-
6	34	31	41	36	47	43	-	-	-	-	-
10	46	42	57	50	65	59	-	-	-	-	-
16	61	56	76	68	87	79	-	-	-	-	-
25	80	73	101	89	114	104	131	114	110	146	130
35	99	89	125	110	141	129	162	143	137	181	162
50	119	108	151	134	182	167	196	174	167	219	197
70	151	136	192	171	234	214	251	225	216	281	254
95	182	164	232	207	284	261	304	275	264	341	311
120	210	188	269	239	330	303	352	321	308	396	362
150	240	216	300	262	381	349	406	372	356	456	419
185	273	245	341	296	436	400	463	427	409	521	480
240	321	286	400	346	515	472	546	507	485	615	569
300	367	328	458	394	594	545	629	587	561	709	659
400	-	-	546	467	694	634	754	689	656	852	795
500	-	-	626	533	792	723	868	789	749	982	920
630	-	-	720	611	904	826	1005	905	855	1138	1070
800	-	-	-	-	1030	943	1086	1020	971	1265	1188
1000	-	-	-	-	1154	1058	1216	1149	1079	1420	1337

COPPER CONDUCTORS

NOTE:

For cables having flexible conductors, see section 2.4 of this Appendix for adjustment factors for current-carrying capacity and voltage drop.

TABLE 4D1B

VOLTAGE DROP (per ampere per metre):

Conductor operating temperature: 70 °C

Conductor cross-sectional area	2 cables, DC	2 cables, single-phase AC						3 or 4 cables, three-phase AC														
		Reference Methods A & B (enclosed in conduit or trunking)			Reference Methods C & F (clipped direct, on tray or in free air)			Reference Methods A & B (enclosed in conduit or trunking)			Reference Methods C & F (clipped direct, on tray or in free air)											
		Cables touching			Cables spaced*			Cables touching, Trefoil			Cables touching, Flat			Cables spaced*, Flat								
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19		
(mm ²)	(mV/A/m)	(mV/A/m)			(mV/A/m)			(mV/A/m)			(mV/A/m)			(mV/A/m)			(mV/A/m)					
1	44	44			44			44			38			38			38			38		
1.5	29	29			29			29			25			25			25			25		
2.5	18	18			18			18			15			15			15			15		
4	11	11			11			11			9.5			9.5			9.5			9.5		
6	7.3	7.3			7.3			7.3			6.4			6.4			6.4			6.4		
10	4.4	4.4			4.4			4.4			3.8			3.8			3.8			3.8		
16	2.8	2.8			2.8			2.8			2.4			2.4			2.4			2.4		
25	1.75	r	x	z	r	x	z	r	x	z	r	x	z	r	x	z	r	x	z	r	x	z
35	1.25	1.80	0.33	1.80	1.75	0.20	1.75	1.75	0.29	1.80	1.50	0.29	1.55	1.50	0.175	1.50	1.50	0.25	1.55	1.50	0.32	1.55
50	0.93	1.30	0.31	1.30	1.25	0.195	1.25	1.25	0.28	1.30	1.10	0.27	1.10	1.10	0.170	1.10	1.10	0.24	1.10	1.10	0.32	1.15
70	0.63	0.95	0.30	1.00	0.93	0.190	0.95	0.93	0.28	0.97	0.81	0.26	0.85	0.80	0.165	0.82	0.80	0.24	0.84	0.80	0.32	0.86
95	0.46	0.65	0.29	0.72	0.63	0.185	0.66	0.63	0.27	0.69	0.56	0.25	0.61	0.55	0.160	0.57	0.55	0.24	0.60	0.55	0.31	0.63
120	0.36	0.49	0.28	0.56	0.47	0.180	0.50	0.47	0.27	0.54	0.42	0.24	0.48	0.41	0.155	0.43	0.41	0.23	0.47	0.40	0.31	0.51
150	0.29	0.37	0.27	0.47	0.37	0.175	0.41	0.37	0.26	0.45	0.33	0.23	0.41	0.32	0.150	0.36	0.32	0.23	0.40	0.32	0.30	0.44
185	0.23	0.30	0.27	0.41	0.30	0.175	0.34	0.29	0.26	0.39	0.27	0.23	0.36	0.26	0.150	0.30	0.26	0.23	0.34	0.26	0.30	0.40
240	0.180	0.24	0.27	0.37	0.24	0.170	0.29	0.24	0.26	0.35	0.22	0.23	0.32	0.21	0.145	0.26	0.21	0.22	0.31	0.21	0.30	0.36
300	0.145	0.185	0.26	0.33	0.185	0.165	0.25	0.185	0.25	0.31	0.17	0.23	0.29	0.160	0.145	0.22	0.160	0.22	0.27	0.160	0.29	0.34
400	0.105	0.150	0.26	0.31	0.150	0.165	0.22	0.150	0.25	0.29	0.14	0.23	0.27	0.130	0.140	0.190	0.130	0.22	0.25	0.130	0.29	0.32
500	0.086	0.120	0.26	0.29	0.120	0.160	0.20	0.115	0.25	0.27	0.12	0.22	0.25	0.105	0.140	0.175	0.105	0.21	0.24	0.100	0.29	0.31
630	0.068	0.098	0.25	0.28	0.098	0.155	0.185	0.093	0.24	0.26	0.10	0.22	0.25	0.086	0.135	0.160	0.086	0.21	0.23	0.081	0.29	0.30
800	0.053	0.081	0.25	0.27	0.081	0.155	0.175	0.076	0.24	0.25	0.08	0.22	0.24	0.072	0.135	0.150	0.072	0.21	0.22	0.066	0.28	0.29
1000	0.042	0.068	-	-	0.068	0.150	0.165	0.061	0.24	0.25	-	-	-	0.060	0.130	0.145	0.060	0.21	0.22	0.053	0.28	0.29
		0.059	-	-	0.059	0.150	0.160	0.050	0.24	0.24	-	-	-	0.052	0.130	0.140	0.052	0.20	0.21	0.044	0.28	0.28

NOTE: * Spacings larger than one cable diameter will result in a larger voltage drop.

The information in this datasheet is for guidance only and subject to change without liability. Images provided are representations; actual cable dimensions may vary due to manufacturing tolerances.

www.battcables.com | 01322 441165

©2024 Batt Cables Limited

